


ROPE 1x19

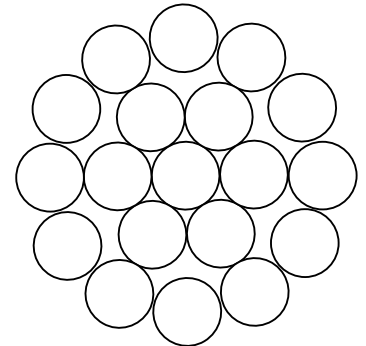

Minimum Breaking Force Factor

K = 0,525

Nominal Length Mass Factor

W = 0,495

Diameter	kg/100M	1770		1960		1570 (AISI)	
		kN	Kg	kN	Kg	kN	Kg
1,0	0,50	0,93	95	1,03	105	0,82	84
1,2	0,71	1,34	136	1,48	151	1,19	121
1,5	1,11	2,09	213	2,32	236	1,85	189
1,8	1,60	3,01	307	3,33	340	2,67	272
2,0	1,98	3,72	379	4,12	420	3,30	336
2,3	2,62	4,92	501	5,44	555	4,36	444
2,5	3,09	5,81	592	6,43	656	5,15	525
3,0	4,46	8,36	853	9,26	944	7,42	756
4,0	7,92	14,87	1.516	16,46	1.678	13,19	1.344
5,0	12,38	23,23	2.368	25,73	2.622	20,61	2.101
6,0	17,82	33,50	3.410	37,00	3.776	29,70	3.025
7,0	24,25	45,50	4.642	50,40	5.140	40,40	4.117
8,0	31,68	59,50	6.062	65,90	6.713	52,80	5.377
9,0	40,09	75,30	7.673	83,30	8.496	66,80	6.806
10,0	49,50	92,90	9.472	102,90	10.489	82,40	8.402
11,0	59,89	112,40	11.462	124,50	12.692	99,70	10.167
12,0	71,28	133,80	13.640	148,20	15.105	118,70	12.099
14,0	97,02	182,10	18.566	201,70	20.559	161,60	16.468
16,0	126,72	237,90	24.250	263,40	26.853	211,00	21.509
19,0	178,69	335,00	34.196	371,00	37.866	298,00	30.332
22,0	239,58	450,00	45.847	498,00	50.768	399,00	40.666
26,0	334,62	628,00	64.034	696,00	70.908	557,00	56.798