


# ROPE 6x24+7FC

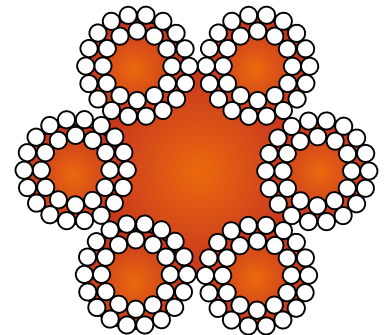

Minimum Breaking Force Factor  
**K = 0,280**

Nominal Length Mass Factor  
**W = 0,318**

Diameter	kg/100M	1770		1960	
		kN	Kg	kN	Kg
6,0	11,45	17,80	1.819	19,80	2.014
8,0	20,35	31,70	3.233	35,10	3.580
9,0	25,76	40,10	4.092	44,50	4.531
10,0	31,80	49,60	5.052	54,90	5.594
12,0	45,79	71,40	7.275	79,00	8.056
13,0	53,74	83,80	8.538	92,70	9.454
14,0	62,33	97,10	9.902	107,60	10.965
16,0	81,41	126,90	12.933	140,50	14.321
18,0	103,03	161,00	16.368	178,00	18.126
20,0	127,20	198,00	20.208	220,00	22.377
22,0	153,91	240,00	24.452	266,00	27.076
24,0	183,17	285,00	29.099	316,00	32.223
26,0	214,97	335,00	34.151	371,00	37.817
28,0	249,31	389,00	39.608	430,00	43.859
30,0	286,20	446,00	45.468	494,00	50.349
32,0	325,63	507,00	51.732	562,00	57.286