


19x7



Art. No.:	Diameter	Weight	1770		1960		1570 (AISI)	
			mm	kg/100m	kN	Kg	kN	Kg
1125030	3,0	3,61	5,23	533	5,79	590	4,63	472
1125040	4,0	6,42	9,29	947	10,29	1.049	8,24	840
1125050	5,0	10,03	14,51	1.480	16,07	1.638	12,87	1.312
1125060	6,0	14,44	20,90	2.130	23,10	2.359	18,50	1.890
1125070	7,0	19,65	28,40	2.900	31,50	3.211	25,20	2.572
1125080	8,0	25,66	37,20	3.788	41,10	4.194	33,00	3.360
1125090	9,0	32,48	47,00	4.794	52,10	5.308	41,70	4.252
1125100	10,0	40,10	58,10	5.918	64,30	6.553	51,50	5.249
1125110	11,0	48,52	70,20	7.161	77,80	7.930	62,30	6.352
1125120	12,0	57,74	83,60	8.522	92,60	9.437	74,20	7.559
1125130	13,0	67,77	98,10	10.001	108,60	11.075	87,00	8.871
1125140	14,0	78,60	113,80	11.599	126,00	12.844	100,90	10.289
1125160	16,0	102,66	148,60	15.150	164,60	16.776	131,80	13.438

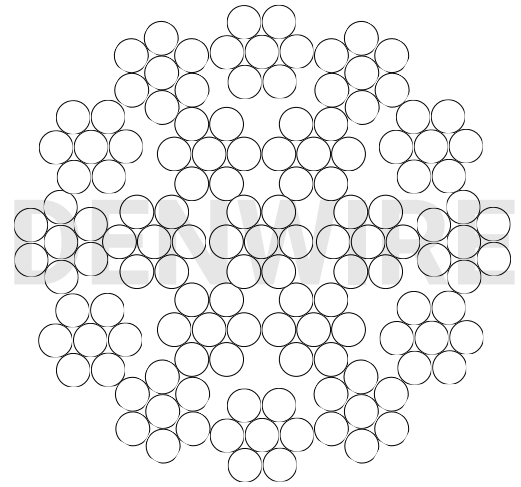

#### Guidance on Dimensions:

Please note that the dimensions provided in this catalog are approximate. For precise measurements or tailored solutions, feel free to reach out to our customer service. Thank you for considering Denwire Ropes.