


## 6x19+FC



Art. No.:	Diameter	Weight	1770		1960		1570 (AISI)	
			kN	Kg	kN	Kg	kN	Kg
	mm	kg/100m						
1008030	3,0	3,11	4,89	499	5,42	552	4,34	442
1008040	4,0	5,54	8,69	886	9,63	981	7,71	786
1008050	5,0	8,65	13,58	1.385	15,04	1.533	12,05	1.228
1008060	6,0	12,46	19,60	1.994	21,70	2.208	17,40	1.769
1008065	6,5	14,62	23,00	2.340	25,40	2.592	20,40	2.076
1008070	7,0	16,95	26,60	2.714	29,50	3.006	23,60	2.407
1008080	8,0	22,14	34,80	3.545	38,50	3.926	30,80	3.144
1008090	9,0	28,03	44,00	4.487	48,70	4.968	39,00	3.980
1008100	10,0	34,60	54,30	5.539	60,20	6.134	48,20	4.913
1008110	11,0	41,87	65,80	6.702	72,80	7.422	58,30	5.945
1008120	12,0	49,82	78,20	7.976	86,60	8.833	69,40	7.075
1008130	13,0	58,47	91,80	9.361	101,70	10.366	81,50	8.303
1008140	14,0	67,82	106,50	10.857	117,90	12.022	94,50	9.630
1008160	16,0	88,58	139,10	14.180	154,00	15.702	123,40	12.578
1008180	18,0	112,10	176,00	17.947	195,00	19.873	156,00	15.919
1008200	20,0	138,40	217,00	22.157	241,00	24.535	193,00	19.653

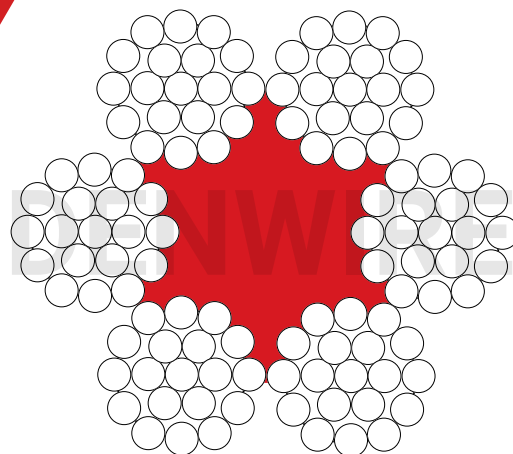

## Guidance on Dimensions:

Please note that the dimensions provided in this catalog are approximate. For precise measurements or tailored solutions, feel free to reach out to our customer service. Thank you for considering Denwire Ropes.